


Expanded Metal Lath

Expanded stainless steel lath, to be embedded in mortar joints, for the reinforcement and crack control of brick and block in non-structural applications. Suitable for use in internal and external masonry leaves.

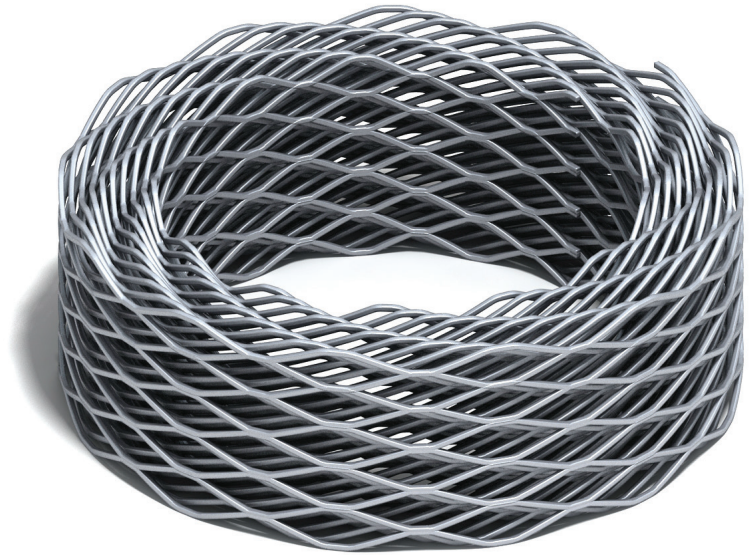

Material: Stainless steel grade 1.4301(304) to EN10088-2:2005

Thickness of steel: 0.4mm

Coil widths: 65mm / 112mm / 178mm / 228mm

Weight kg/m²: 1.11kg/m²

Coil length: 20m

Material	Width	Coil Length	Product Code
Stainless Steel	65mm	20 m	XM65_20MTR
Stainless Steel	112mm	20 m	XM112_20MTR
Stainless Steel	178mm	20 m	XM178_20MTR
Stainless Steel	228mm	20 m	XM228_20MTR

COSHH / Health & Safety

Contains no substances hazardous to health.

The comparative rough surface finish and sharp edges of expanded metal requires care when handling manually. To avoid risk of cuts and abrasions gloves should be worn.